


OUTDOOR DISPLAY SCREEN



55

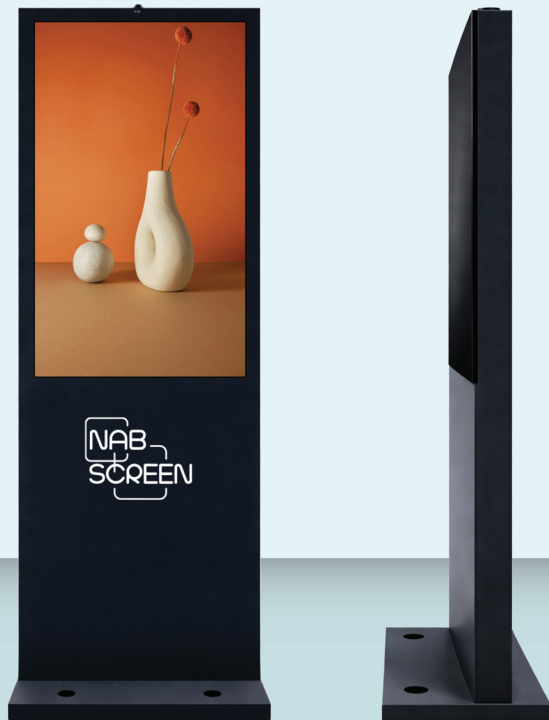

1920 x 1080



2000 Nits



Abdroid 7.1



No Touch



8RAM+128GB



SCREEN SIZE		55 inches
DISPLAY AREA		1209*680mm
DISPLAY RATIO		16:9
RESOLUTION		1920*1080
BRIGHTNESS		2000cd/m2
CONTRAST		1200:1
VIEWING ANGLE		178° horizontal / 178° vertical
CPU		RK 3288 /RK3568
MEMORY		2GB DDR (4GB and 8GB optional)
HARDDISK		16GB Flash (32GB, 64GB , and 128GB optional)
INTERFACE		USB 2.0*4 RJ45*1
VERSION		Android 7.1 and above
VIDEO INTERFACE		LVDS/HDMI output
PROTECTION LEVEL		IP55
PROTECTIVE GLASS		6mm tempered explosion-proof glass
BRIGHTNESS CONTROL		Automatic light sensing system
AUDIO POWER		8 Euros 2 x 10W
COOLING SYSTEM		Automatic temperature-sensing stepless speed smart fan
OPERATING TEMPERATURE		-30° C to +50° C
OPERATING HUMIDITY		5% to 90%
WORKING LIFE		50000h
POWER SUPPLY		220V
POWER		400W
SHEET METAL CASING	Sheet	metal casing is made of 1.5mm SGCC galvanized steel sheet.
	She11	inner layer is coated with zinc-rich , & outer layer is coated.
	Service	The service life is guaranteed to be more than 10 years.
EXPLOSION PROOF	Performance	6mm tempered glass, when broken by external force, shatters into small, blunt-angled fragments resembling a honeycomb.
ELECTRICAL CONTROL SYSTEM	Leakage	Leakage protection, overcurrent and overvoltage protection.
	Timed	machine's start & stop are controlled by time period & week.
	Lightning	lightning protection level C, to prevent instantaneous induced.
COOLING SYSTEM	Power	power supplies from Taiwan provide stable and reliable.
	Temperature	fan integrates temperature control, ensuring the display screen.
	Fan type	It uses imported axial fans and an intelligent control board with speed adjustment and timer operation.
WORK ENVIRONMENT	heater	(Optional) PTC heating module.
	Ambient	-30C° to 50C°
	Ambient	5% to 90%
TOTAL	Operating	220V
		100KG
PACKAGING		2130mm (L) x 540mm (w) x 1040mm (H) (Landscape)