





Epson I3200
Print Head



Anti-collision Printhead
protection system



Magnetic Encoder
Strip

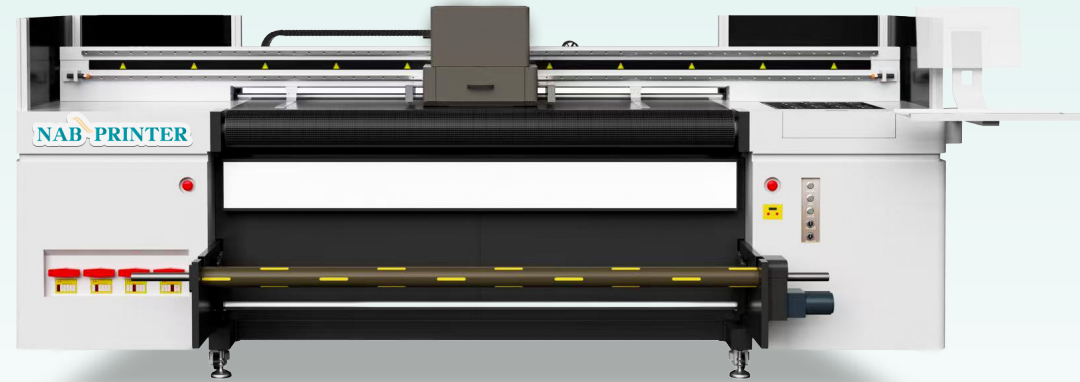

Industry Application



Subway Advertisement



Soft Film



Wall cloth



KT Board



Texture oil Painting

CMYK Color Profile



C
Cyan



M
Magenta



Y
Yellow



K
Black



W
White



V
Varnish

Model	NAB-1900 UVH		Media Processing	Roll to Roll+Auto Feeding+Auto Roll Up
Print Head	EPSON I3200		RIP	FLEXIPRINT (Overseas Standard) MAINTOP (Domestic Standard) / ONYX / CALDERA / PRINT FACTORY (Optional)
Print Head Number	6H	8H	File Format	BMP/TIFF/EPS/PDF/JPEG
Print Mode	UV Ink: CMYK, LC, LM, LK, LLK, White, Varnish, Fluorescent M/Y/G/O		Data Connector	USB 3.0/Gigabit Ethernet Port
Print Width	1820 mm		Voltage	AC 220V, 50Hz±10%, UPS is required
PrintSpeed (sqm/h)	Standard Mode	48 m ² /h	Power	3500W
	Production Mode	33 m ² /h	PC Configuration	CPU: INTEL I5/I7 RAM: 16G SSD: 250G (For Disk C Only) HD: 2TB Motherboard: ASUS
	High Resolution Mode	24 m ² /h		
Print Resolution	2400 dpi		Temperature / Humidity	Temperature 20-30 °C Humidity 60-70%
Media Type	LED UV Lamps Curing		Packing Size L/W/H	4.17x1.82x1.80 m
Media Heating	Outdoor Solvent / Eco-solvent Based Roll Media (Flex, Vinyl, Leather, Artificial Leather etc)		G.W./N.W.	1300kg/1200kg

