




Konica
Print Head




RICOH GEN6
Print Head



Anti-collision Printhead
protection system



Magnetic Encoder
Strip

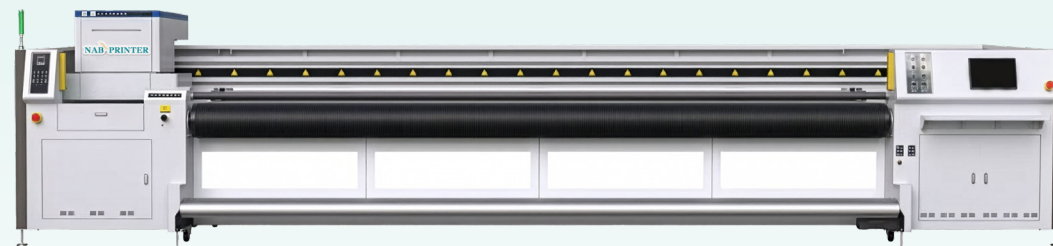

Industry Application



Subway Advertisement



Soft Film



Wall cloth



KT Board



Texture oil Painting

CMYK Color Profile



C
Cyan



M
Magenta



Y
Yellow



K
Black



W
White



V
Varnish

Model	NAB-5500 UVH		Media Processing	Roll to Roll+Auto Feeding+Auto Roll Up
Print Head	KYOCERA12 pcs (6/7/8/12 pcs Optional) Konica12pcs(8/16/24pcs Optional)		RIP	FLEXIPRINT (Overseas Standard) MAINTOP (Domestic Standard) / ONYX / CALDERA / PRINT FACTORY (Optional)
Print Head Number	1024 i / 1024 a KYOCERA		File Format	BMP/TIFF/EPS/PDF/JPEG
Print Mode	UV Ink: CMYK, LC, LM, LK, LLK, White, Varnish, Fluorescent M/Y/G/O		Data Connector	USB 3.0/Gigabit Ethernet Port
Print Width	5000 mm		Voltage	AC 220V, 50HZ±10%, UPS is required
PrintSpeed (sqm/h)	Standard Mode	130 m ² /h	Power	8000 W
	Production Mode	110 m ² /h	PC Configuration	CPU: INTEL i5/i7 RAM: 16G SSD: 250G (For Disk C Only) HD: 2TB Motherboard: ASUS
	High Resolution Mode	80 m ² /h		
Print Resolution	2400 dpi		Temperature / Humidity	Temperature 20-30 °C Humidity 60-70%
Media Type	LED UV Lamps Curling		Packing Size L/W/H	8.07x2.25x1.95m
Media Heating	Outdoor Solvent / Eco-solvent Based Roll Media (Flex, Vinyl, Leather, Artificial Leather etc)		G.W./N.W.	6330kg/5800kg

