


2ALGD2202CA

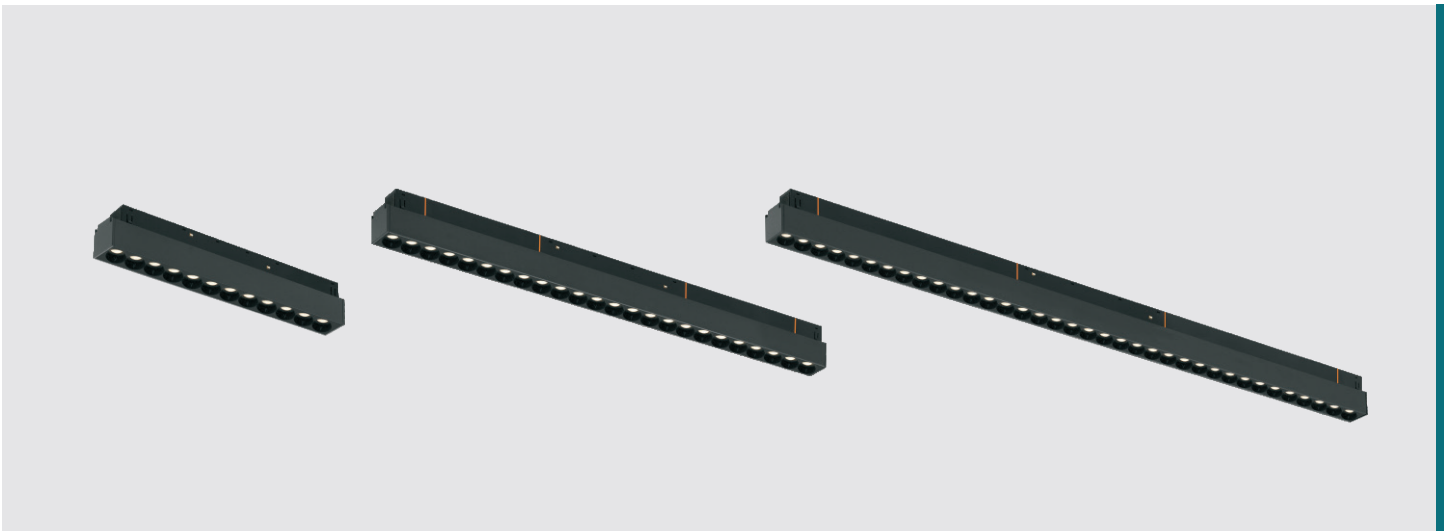

Design concept

As today's mainstream lamp, magnetic rail lamp is highly respected by designers for its flexibility, convenience and fashion. Through the space, the simple and atmospheric visual impression gives the home a full fashion style. The floodlight module is a basic lighting module, which can bring a minimalist and extended visual experience in shape. Combined with the grille module, key lighting is added to the bright areas. Whether it is the key lighting used to highlight architectural elements, the overall lighting that provides basic illumination, or the atmosphere lighting that enhances space emotion, it can be met with a group of lamps of magnetic absorption track system.


Range of application

Generally, it is widely used in clothing stores, jewelry stores, exhibition halls, hotels, clubs and other commercial places that need decorative effects and key lighting. However, because of its fashionable appearance, full sense of technology, high flexibility and so on, it is loved by more and more young people, and is often used by designers for household lighting in living rooms, bedrooms, study and so on. Empower design and add color to life!

2ALGD2202CA-12W


Basic parameter

Warranty	5 years
Wattage	12W
Size	L235*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	24°/38
Fitting Material	Aluminum+pc
Finish Color	Sand White/Sand Black
Working Temperature	-10 ~40 s
Product Standards	IEC(or EN)60598-1
Certification	CB/CE/ERP




Light parameters

Led Brand&Type&CCT	OSRAM 3030 6V 1W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	88.59Lm/W
Led chip numbers	12PCS
Lumen	3000K: 999.6Lm 4000K: 1020.1Lm 5000K: 1045.3Lm

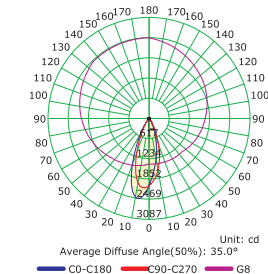

Driver parameter

Driver Brand & Type	PNY
Input	DC 48V
Output	DC9-42V 300mA
Powerrating	12W
Power Factor	/
Typical Efficiency	≥94%
Ta/Tc	45 /75
Surge	1000V

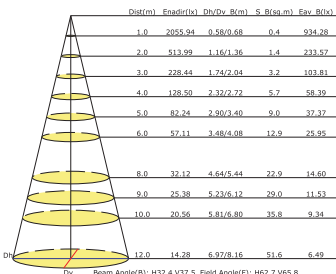

Packaging parameter

Quatity(pcs/Ctn)	48
N.W.(g*pcs)	173*48
G.W. (Kg/Ctn)	10.1
Inner Box(mm)	L50*W28*H248
Outer Box(CM)	L32*W26*H25
Volume(M /Ctn)	0.0208
N.W : (g/pcs)	199
N.W : (g/pcs)	173

2ALGD2202CA-18W


Basic parameter

Warranty	5 years
Wattage	18W
Size	L349*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	24°/38
Fitting Material	Aluminum+pc
Finish Color	Sand White /Sand Black
Working Temperature	-10℃~40℃s
Product Standards	IEC(or EN)60598-1
Certification	ERP




Light parameters

Led Brand&Type&CCT	OSRAM 3030 6V 1W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	101.9Lm/W
Led chip numbers	18PCS
Lumen	3000K:1527.1Lm 4000K: 1556.4Lm 5000K:1586.41Lm

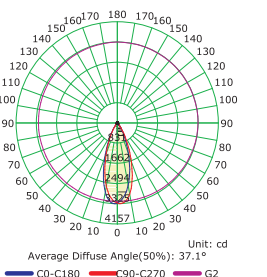

Driver parameter

Driver Brand & Type	PNY
Input	DC 48V
Output	DC9-42V 400mA
Powerrating	18W
Power Factor	/
Typical Efficiency	≥94%
Ta/Tc	45℃/75℃
Surge	1000V




Packaging parameter

Quatity(pcs/Ctn)	36
N.W.(g*pcs)	253*36
G.W. (Kg/Ctn)	10.2
Inner Box(mm)	L50*W28*H363
Outer Box(CM)	L37.5*W32*H19
Volume(M³/Ctn)	0.0228
N.W : (g/pcs)	268
N.W : (g/pcs)	253

2ALGD2202CA-24W


Basic parameter

Warranty	5 years
Wattage	24W
Size	L462*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	24°/38
Fitting Material	Aluminum+pc
Finish Color	Sand White /Sand Black
Working Temperature	-10 ~40 s
Product Standards	IEC(or EN)60598-1
Certification	CB/CE/ERP




Light parameters

Led Brand&Type&CCT	OSRAM 3030 6V 1W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	89.3Lm/W
Led chip numbers	24PCS
Lumen	3000K:2012.3Lm 4000K: 2057.9Lm 5000K: 2102.5Lm



Driver parameter

Driver Brand & Type	PNY
Input	DC 48V
Output	DC5-42V 600mA
Powerrating	24W
Power Factor	/
Typical Efficiency	≥94%
Ta/Tc	45 /75
Surge	1000V




Packaging parameter

Quatity(pcs/Ctn)	36
N.W.(g*pcs)	253*36
G.W. (Kg/Ctn)	14.2
Inner Box(mm)	L50*W28*H477
Outer Box(CM)	L49*W32.5*H19
Volume(M /Ctn)	0.03026
N.W : (g/pcs)	381
N.W : (g/pcs)	339

2ALGD2202CA-36W


Basic parameter

Warranty	5 years
Wattage	36W
Size	L690*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	24°/38
Fitting Material	Aluminum+pc
Finish Color	Sand White /Sand Black
Working Temperature	-10°C~40°Cs
Product Standards	IEC(or EN)60598-1
Certification	ERP




Light parameters

Led Brand&Type&CCT	OSRAM 3030 6V 1W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	87.5Lm/W
Led chip numbers	36PCS
Lumen	3000K:2865Lm 4000K:2986Lm 5000K:3086Lm



Driver parameter

Driver Brand & Type	PNY
Input	DC 48V
Output	DC9-42V 800mA
Powerrating	36W
Power Factor	/
Typical Efficiency	≥94%
Ta/Tc	45°C/75°C
Surge	1000V

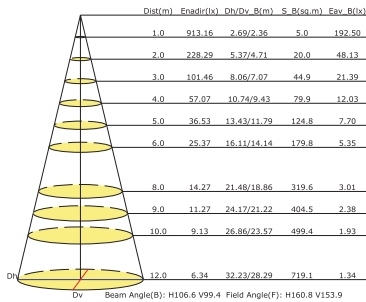

Packaging parameter

Quantity(pcs/Ctn)	25
N.W.(g*pcs)	253*36
G.W.(Kg/Ctn)	15.6
Inner Box(mm)	L50*W28*H704
Outer Box(CM)	L71.5*W26.5*H16.5
Volume(M³/Ctn)	0.03126
N.W.:(g/pcs)	597.6
N.W.:(g/pcs)	525

