



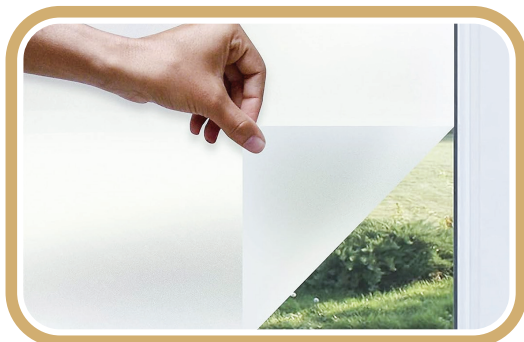

TECHNICAL INFORMATION

Application : Window decoration



Embossed Frosted pvc
 PERMANENT ADHESIVE
 LINER: 140g single PE-coated silicone paper

Performance & Physical Data

Specification				Testing Method
Surface finish			Embossed opaque	
Thickness	Film	μm	100 $\pm$ 5	KS A 1107
	Adhesive	μm	23 $\pm$ 2	KS A 1107
	Release paper	μm	140 $\pm$ 3	KS A 1107
Adhesive strength	20min. after stick	kgf/in	1.3 $\pm$ 0.03	KS A 1107
	24hr. after stick	kgf/in	1.7 $\pm$ 0.03	KS A 1107
Ball tack	30 degree angle		Ball No. 9	KS A 1107
Tensile strength	Vertical	kgf/mm ²	$\geq$ 2.17	ASTM D882
	Horizontal	kgf/mm ²	$\geq$ 2.01	ASTM D882
Elongation	Vertical	%	$\leq$ 283	ASTM D882
	Horizontal	%	$\leq$ 212	ASTM D882
Dimensional stability		%	max 3% shrinkage	70°C x 48hr
Application temperature			10°C to 40°C (on clean and dry surfaces)	
Service temperature			-15°C to 70°C	
Roll size			1000~1520mm X 50m	
Service year			1 year	

※ Actual measurements may slightly different from the actual products.

※ This specifiaction shows the performance of spec, and the specification value can be changed depending on the solvent compositions.