

LED (RGB WW) Flexible strip light

Features:

عدسة 5050 بمعدل 60 عدسة / متر، عالية السطوع.
High brightness, using 60 grain, 5050SMD LED.

موفر للطاقة ، مدعوم بتيار مستمر عالي الكفاءة
موفرًا للطاقة بنسبة 7.80%.

Energy saving, driven by high efficiency constant current than traditional energy -saving fluorescent 80%.

استهلاك منخفض للطاقة ، يمكن أن يصل إلى عدد ساعات عمل تزيد عن 30,000 ساعة.

Low energy consumption, can reach 30,000hrs above>

القدرة على التحكم بدرجة اللون والإضاءة والسطوع والتحكم فيها عن بعد.

The ability to control color, lighting and brightness and control it remotely.

سهل التركيب وسهل الاستخدام.


Easy installation and easy to use.

صديقة للبيئة ولا تحمل معادن ثقيلة أو غازات ضارة.

Environmental protection, not heavy metals and harmful gas.

أمنة على العين.

No glimmered, protection to your eyes.

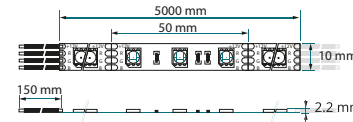


Items:

Code	Color	Volt	Total Lumen Output
NAB_000	RGBWW	24 V	R:750 G:1700 B:340 WW:2700

Technical Specifications:



- Power 72 W/roll - 14.4 W/M
- Life Time 30,000 hrs

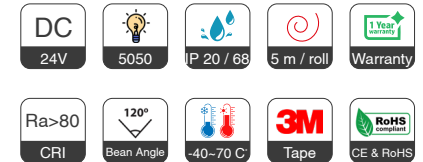

LED-2835 Flexible strip light:

Instruction of Wiring:

- The most important, cut off power supply before installation.
- The LED fluorescent lamp avoid to install at the heat source, hot steam and corrosive gas place for long life span.
- Before installation, PLS confirmed that the installation place can endure 10 times heavy as the product weight .install at the flat place. No swing, No fire.
- **Light Source Test Report:**

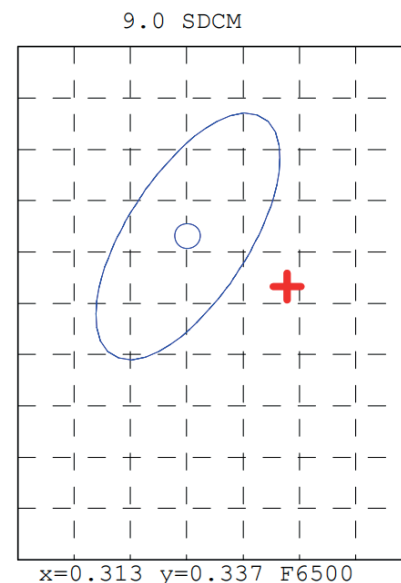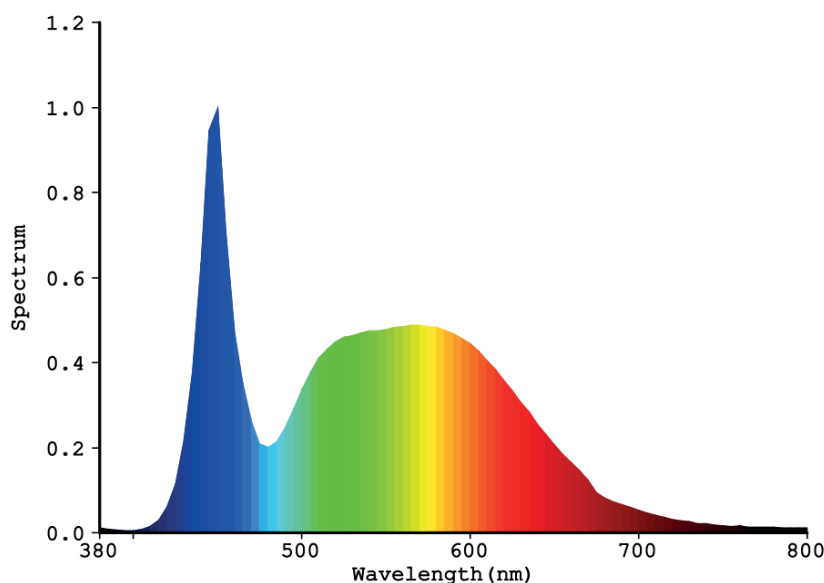


Color Parameters								
Chromaticity Coordinate	x=0.3206(dx=-0.0002)				y=0.3331(dy=0.0025)			
Chromaticity Coordinate	u'=0.2018		v'=0.4716(duv=1.39e-03)			Tc=6070K		
Dominant WL	Ld=491.4nm				Purity=4.3%			
Centroid WL					543.0nm			
Ratio	R=15.3%		G=80.2%		B=4.5%			
Peak WL					Lp=450.0nm			
HWL					22.0nm			
					Ra=82.6			
Render Index	R1 =82	R2 =85	R3 =88	R4 =84	R5 =83	R6 =80	R7 =87	R8 =71
	R9 =11	R10=65	R11=85	R12=62	R13=82	R14=93	R15=77	
Photo Parameters								
Flux					969.3 lm			
Fe					3.7928 W			
Efficacy					85.85lm/W			
Electrical Parameters								
Luminaire	U=12.00V		I=0.9411A		P=11.29W		PF=1.000	
Instrument Status								
Scan Range					380.0nm-800.0nm			
					5.0nm[0]			
Interval	Ip=13489(G=3,D=54)		REF=47403(R=4)		%=-0.025%			
PMT					22.9 centigrade [21.5]			

LED-2835 Flexible strip light:

Product Type	5050 led strip	Manufacturer:	ibeled
Number	000000099	Test Department	
Temperature	25.3 deg ree	Humidity	:65.0%
Test Operator	ZHANG	Test Date	2020-12-25 17:51:30
Software	V2.00.122	Instrument	PMS-80_V1 (SN:YG107113N12010028)

Packing Size:

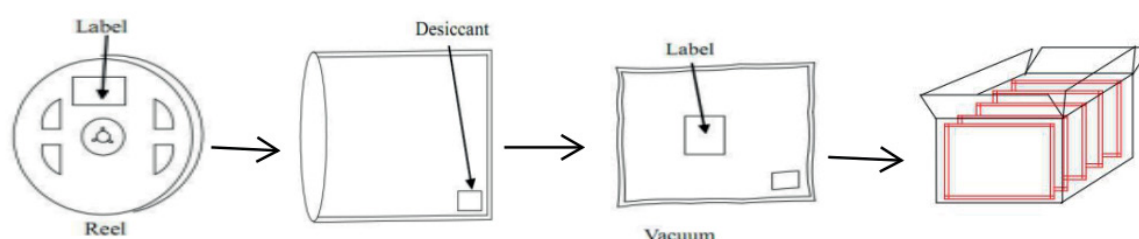

Item	Dimension	Carton Size	PCS/Carton
LED-BL-CF-W-NAB	5000MM*8MM	430MM*300MM*250MM	50Roll

Noted:

- Warranty: 1 year
- Unsealing, please carefully inspect the goods is complete. Any injury, please don't use And contact with us as soon as you can.
- Application: For house, hostel, supermarket, office, parking, factory, advertising box etc., high bright LED tube light can give you a green environment and good mood.